Sectt. H-27—104,006—4-11-49.

# Health (1951 ) Department.

MS. SERIES.

closed
P.
24.7.51
Supdh.

G.O. NO. 2552.

Dated 18.7.51.

---

[Despatch Abstract.]

W.S. and Drainage - Wats supply - Mangalore Mfy - Land Acquisition and approach road to Headworks - Revised estimate - Sanctioned -

PUBLIC WORKS DEPARTMENT.

Letter No. 5358 PWW/49-25, Dated the 31st March, 1951.

From
Sri A... Venkatachari,
... L.E., I.J.E.(Ind.),
I.P.H.Soc.C.E., I.S.E.,
Chief Engineer, P.W.D., (General),
Chepauk, MADRAS.

To
The Secretary to Government,
Health Department,
Fort St. George,
MADRAS.

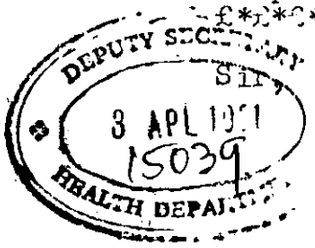


Sir,

Sub: Bangalore Water Supply Scheme - Revised Estimate for forming the approach road to head works.
Ref: G.O. Ms. No. 903, Health, dated 11-3-1950.

-:-

In the G.O. cited above, overnment sanctioned an estimate, amounting to Rs.23,300/- for the sub work "land acquisition and approach road to head works" of the Bangalore Water Supply Scheme. The Sanitary Engineer now reports that the original estimate furnished by him was only approximate and that on a further inspection it was found that portion of the alignment of the road as per the sanctioned proposal was on land that would be submerged even during ordinary floods in the Gurpur River, thereby rendering the approach road unusable for a considerable period in the year. A revised alignment for the road has therefore been fixed, after an inspection, so that the road would not get submerged even during the M.F.L. conditions of the river. The report with the estimate for the revised proposals, furnished by the Sanitary Engineer is enclosed.

2. The reasons for the excess over the previous sanctioned estimate have been given in the report to accompany the revised estimate, the main points being the following:--

(i) change of alignment to avoid submersion of the road even during M.F.L. conditions of the river;
(ii) the difficult nature of the terrain, which requires very nearly a ghat road alignment involving also more width of land acquisition, than was proposed originally;
(iii) increase in the rate of acquisition per acre of land, as now furnished by the local officers of the Revenue Department and
(iv) provision of cross drainage works found necessary.

The Sanitary Engineer has provided a laterite metalled road in the revised estimate. As the road is not intended for use by the public, but is only for gaining access to the Water Supply Head Works and for inspection purposes, a graveled road is enough. The savings in the estimate on this account alone will be about Rs.8,800/- . Other technical details to be attended to before execution are being communicated to the Sanitary Engineer separately

As the necessity for an approach road to the Head Works is keenly felt for the proper and speedy execution of the head works which is already under progress, I recommend that sanction may be accorded to the revised estimate for Rs.63,000/- and request that early orders of the Government may please be obtained to facilitate speedy execution of the scheme.

R. Lakshmanan 31/3/51

for CHIEF ENGINEER, P.W.D., (GENERAL).

Encl:- 1. report to accompany the estimate.
2. Index plan.
3. Revised estimate with comparative statement etc.

d 31.3.

REPORT TO ACCOMPANY THE REVISED ESTIMATE FOR THE WORK OF FORMING AN APPROACH TO THE HEADWORKS FOR THE MANGALORE WATER SUPPLY SCHEME.

Original estimate Rs. 23,300/-.
Revised Estimate Rs. ~~71,800/-~~. 63,000

(A)

The estimate for Rs. 23,300/- sanctioned in G.O. No. 903 Health dated 11-3-1950 for the above work was only an approximate estimate. On a further inspection of the site prior to preparation of detailed plans and estimates it was found that the alignment of the road to be formed was on grounds that would be submerged even during ordinary floods in the Gurpur River and that for a considerable period of the year the road would be under water. The proposed alignment was also along wet fields for most of its length and no provision was made in the estimate for embankments for the road where it runs along wet fields and for culverts over drainage courses and irrigation channels. Acquisition of land originally proposed, both for the formation of road as well as for laying of the pumping main was only 20' which is considered insufficient, as the pumping main to be laid along this route is 24" diar., and adjoining wet land owners may not permit of any encroachment into their lands, even as a temporary measure.

2 With a view to get at a more suitable alignment which would be always above high flood level, detailed survey of the whole area was made and a satisfactory alignment was marked out on the ground. This was inspected by the Sanitary Engineer to Government on 8-10-1950 and a fresh estimate for forming the road along this alignment is now prepared and submitted for sanction.

3 Land acquisition is now proposed for 30 ft. width all along in order to get sufficient width of land available for forming a road as well as taking a C.I. Main 24 " diar. at the side. The area of land to be acquired for headworks site has also been included in this estimte.

4 The Road takes off from the Managalore - Karakkal Road near Gurpur village and leads to the headworks. The distance is about 7,200 ft. L.S. and C.S. of the proposed alignment have been taken and the formation level is marked on the section. The alignment and formation of the road is proposed in such a way as to keep as far as possible to the level of the terrain and that there is minimum earthwork involved. A minimum embankment of about 1½' to 2' is proposed along the wet fields so that the road may not be flooded and rendered unfit for use. The formation width will be

P.T.O.

will be 20'-0". ~~Soling~~ Soling is omitted as the soil is hard gravel. The ~~metalled~~ gravelled portion will be 10'-0" wide with 6" thickness ~~metalling using 1½" to 3" size laterite metal,~~ of gravel spread and consolidated in two layers of 3" each by hand roller, ~~using ½" gravel blindage, if found necessary,~~; the final surface will be finished with ¼" sand.

Practically, all the culverts in the alignment are across small irrigation channels, with almost in-significant catchments, and a 12" hume pipe culvert is considered sufficient. But the culverts 1, 3 & 8 which have to be built across deep cutting, should be capable of discharging larger quantities of water and will have to be properly designed. As sufficient details are not readily available to actually design these culverts and as work is urgent, a lumpsum provision is made in this estimate for the 18 culverts across drainge course and irrigation channels. Detailed working estimates for the lumpsum provision will be prepared on correct data at the time of execution.

Necessary provision is also made for the conveyance of earth required for the formation of the road, blasting rock, and revetting the side slopes of the embankment, whereever found necessary.

for SANITARY ENGINEER TO GOVERNMENT.

6-2-51

Name of work: Revised estimate for forming approach Road to Headworks - Mangalore water Supply Scheme.

ESTIMATE FORM - Comparative
Statement~~x~~ of Differences.

| Description of work | Item No. | Original estimate Qty. | Original estimate Rate | Original estimate Amt. | Revised Estimate. Qty. | Revised Estimate. Rate | Revised Estimate. Amt. | More | Less | Explanation of difference. |
|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |
| | | | Rs. | Rs. | | Rs. | Rs. | | | |
| I. Land Acquisition. Acquisition of dry land Addur village and Tenkulipadi village. | 1 | 1.65 | 200 | 330 | 1.83 | 460 | 842 | 512 | | The rates as given by R.D.O.- the excesses in area are due change in alignment and width of land. |
| -do- Garden lands | 2 | 1.44 | 500 | 720 | 1.44 | 2600 | 3744 | 3024 | | |
| -do- Wet lands | 3 | 3.00 | 1000 | 3000 | | | | | | |
| -do- Single crop | 3(a) | | | | 1.25 | 1610 | 2013 ~~6286~~ 6396 | 6502 | | Single crop and double crop land. The classification varied and given by R.D.O. |
| -do- Double crops | 3(b) | | | | 2.46 | 2600 | ~~2013~~ | | | |
| -do- Roads side land | 3(c) | | | | 0.19 | 5750 | 1093 | | | |
| Add compensation for buildings shed etc. at Head Works. | 3(d) | | | ~~L.S.~~ | L.S. | | 1500 | 1500 | | As required now. |
| Compensation for trees ~~Addxxx

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | 16312 | 12262 | 2160 | |
| II Forming Road. Forming road with gravel 6" thick including consolidation, with hand stone roller, blinding with sand ½" thick. | 6 | 12495 sft. | 7-8-0 / 100 cft. | 9371 / | | | | | 9371 / | Vide items 6(a) to 6(f) below. |
| Excavation in hard gravelly soil. | 6(a) | | | | 260 / units | 21-14-0 / | 5688 / | 5688 / | | Vide details for the quantity and data furnished. |
| ~~Providing side~~ | | | | | | | | | | New item found necessary. |
| Conveyance of earth for embankments etc. | 6(b) | | | | | L.S. | 1800 // | 1800 / | | vide separate details furnished.. |
| Construction of 18 culverts. | 6(c) | | | | | L.S. | 18500 / | 18500 / | | vide separate details with approximate values. |
| Blasting rock wherever necessary | 6(d) | | | | | L.S. | 1500 / | 1500 / | | vide separate details furnished. |
| | | | | | | | | 27488 / | | |
| Collection conveying spreading laterite metal 1½" to 3" size to form 6" thick road spreading gravel ½" thick watering rolling etc. | 6(e) | | | | 720 / units | 7-8-0 / ~~17-8-0~~ | 5400 / 12600 / | 5400 / ~~12600~~ | | Data and details furnished. |
| Contructing revertment where-ever necessary | 6(f) | | | | | L.S. | 600 / | 600 / | | This provision is made now. |
| Providing side drains forming berms making up Road dips with soling stones metal gravel etc. | X 7 | | L.S. | 1800 | | | 33488 | | 1800 | Omitted. |
| Probable fluctuation in rates for labour and cost in materials. | | | L.S. | 1117 | | | ~~33488~~ / (1118) | | 1117 | Since rates are based on current schdule of rates this provision is omitted. |
| | | | | | | | 49800 | 32888 | | |
| | | | | 18498 | | | | | | 14448 |

## ESTIMATE FORM—Comparative Statement of Differences.

P.W.D. V-17.

| Description of work. (1) | Item No. (2) | Original Estimate. Quantity. (3) | Rate. (4) | Amount. (5) | Revised Estimate. Quantity. (6) | Rate. (7) | Amount. (8) | More. (9) | Less. (10) | Explanation of difference. (11) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | Rs. | Rs. | | Rs. | Rs. | Rs. | Rs. | |
| a | | | | 18498 | | RE | 57000 | 52950 | 14448 | |
| Unforeseen items at 4% | 17 | | | 750 | | | 2300 | 1550 | | |
| Contingencies and petty supervision at 5% | 18 | | | 925 | | | 2850 | 1925 | | |
| Add centage charges at 15½% | 19 | | | 3127 | | | 9650 | 6523 | | |
| **Total** .. | | | | 23300 | | | 71800 | 62948 | 14448 | |

Deduct amount of estimate already sanctioned in G.O.No,903-H dated 11-3-50. 23300

Net amount requiring sanction — — — — Rs. 48500

Sanctioned for Rs. (_____, _____

_____ only

in supersession of C.R. No._____ of _____

Sen. 6/2/51
JSV/5-2.

*Executive Engineer.*

Ooty.

*Superintending Engineer.*

for Sanitary Engineer to Govt.

P.W.D. V-17.

Amount of Revised Est. Rs.71800/-

E. No. 36.

*Stage of Progress of the work.*

The work is not yet started. The original approximate est. for Rs23300/- was found insufficient on further examination prior to the preparation of detailed plans and estimates. These have now been prepared and are submitted for fresh administrative approval.

Circle - Sanitary Engineering.

Division-Coimbatore Public Health

District—South Kanara.

ESTIMATE FORM—Comparative Statement of Differences.

accompany the Revised Estimate of 194 , for *

Forming approach road to Head Works for Mangalore Water Supply Scheme

Sanctioned original approximate estimate Rs.23,300/-
Administratively sanctioned in G.O.No.903 H dated 11-3-50

Present revised estimate Rs.71,800/- (Detailed)

Excess requiring sanction Rs.48,500/-

* Here enter the name and description of work in full.

#205

Health (H2)

W.S. Mangalore Mlty.
Land Requisition and approach road to Headworks.
Revised estimate.

Read:- G.O no 903. H. d 11-3-50

Rep: from the C.E., PWD. gl. letter no 5358 PH2/49 -25 d 31-3-51.

Memo no: 15039 H2/51-1. d — 16-4-51

~~A copy of the~~ letter from the C.E., PWD read above with its enclosure in original is forwarded to the Commr, Mangalore Mlty. He is requested to ~~place the matter before the Mlt. Cl. and~~ ascertain and ~~forward to Govt~~ for its views and state how the council propose to finance the enhanced cost of the work.

16/4
20
16/4

16/4

To the Commr, Mangalore Mlty, thro' the C.M.C. (with ~~copies of ppts & CF~~ ~~and pages 5 to 10~~ as in ack. dtd to be returned with reply) by R.P.

~~Copy~~ to the C.E., PWD. gl. 12.4.51

12/4/51

18.4.51

Office of the Sanitary Engineer to Government,
Chepauk, Madras.

Memo No.6871 W/51-1 WS dated 13-4-1951.

Sub:- Mangalore Water Supply Scheme - Forming approach road to the Head Works - Re:

Ref:- From the Executive Engineer(PH) Coimbatore D.O.No.24 dated 30th March 1951.

The revised estimate for forming the approach road to the Head Works has been submitted by the Chief Engineer to the Government for sanction. As soon as orders of Government are received, the estimate will be forwarded to him with necessary instructions for proceeding with the execution of the work. In the meantime in view of the urgency explained by him in his D.O. cited above, the Executive Engineer (PH) is permitted to take possession of the land required for the purpose and incur expenditure on that account to the extent necessary.

2. His proposal to entrust the work of forming the road to the same contractor, who is now doing the work of constructing the 340 ft. infiltration gallery viz. Canara Manufacturing Corporation without inviting tenders is not acceptable. He is requested to invite tenders for the work on K-2 contract basis, allowing a fortnight's time for the receipt of tenders and submit the tenders for orders. Tenders may also include for the following alternative items in addition to earthwork excavation in hard gravely soil and conveyance of earth:-

(i) Forming road with gravel 6" thick including consolidation with hand stone roller and blinding with sand 2" thick.

(ii) Collecting, conveying, spreading laterite metal 1½" to 3" size to form 6" thick road, spreading gravel 2" thick watering rolling etc.

No financial commitment should however, be incurred on the laying of the road without specific orders from this office.

S. Rajagopalan
Sanitary Engineer to Government.

p.5 infra
received

Copy with a copy of D.O.No.24 dated 30th March 1951 from the Executive Engineer(PH) Coimbatore submitted to the Chief Engineer, P.W.D.(General) in continuation of this office letter No.6941 W/51-1 WS dated 9-4-1951.

(2) In view of the facts explained by the Executive Engineer(PH), I agree with him that it is essential to take up the work this season itself and I have therefore instructed him to take possession of the land and incur expenditure on the acquisition of land pending sanction to the estimate by the Government, and also to call for tenders for the formation of the road work with alternative rates for a metal road and a gravel road. The tenders will be decided on receipt with reference to such orders as may be issued by the Chief Engineer on my letter No.6941 W/51-1.WS dated 9-4-1951. I request that my action in having authorised the Executive Engineer(PH) Coimbatore to take action on the above lines pending sanction to the estimate for the work may please be ratified.

Encl: The D.O.Letter)

13/4/51

Acs/13-4-51.

For SANITARY ENGINEER TO GOVERNMENT

To the Chief Engineer, P.W.D.(General) Madras.

Copy of D.O.No.24 dated 30th March 1951 from the Executive Engineer(PH) Coimbatore Division to Sri S. Rajagopalan, B.E., M.I.E., Sanitary Engineer to Government, Madras.

---

Dear Sri Rajagop[redacted]

Ref:- Your D.O.No.24897-Wka/50-1-WS dated 6-1-1951.

Sub:- Mangalore water supply Scheme - Revised estimate for forming the Approach Road to Head works.

---

The Assistant Engineer, Mangalore has attended your office and carried out your instructions regarding the Revised estimate.

I understand from Sri R. Lakshmana Iyer, Deputy Chief Engineer who visited Coimbatore recently that the Revised Estimate for the Approach Road has been sent up to Government for sanction.

The work has to be started now to enable us to do anything before the commencement of the monsoon. If we do not enter upon the land the ryots will commence agricultural operations and we would be able to do nothing before next February. I request you therefore to give me permission to start the work in anticipation of Sanction by Government and to obtain orders of the Chief Engineer to waive tender and entrust the work to the contractor who is entrusted with the work of constructing the 340 Ft. of Infiltration Gallery viz. Canara Manufacturing Corporation. If action like this is not taken now we will not be able to take up this work till next February.

I have sent Land Acquisition plan, schedule etc. to the Revenue Department and have also obtained permission from the owners to enter upon the land in anticipation of regular acquisition proceedings.

If therefore orders are issued within a fortnight I could take up the work during this season, failing which the ryots will start agricultural operations and we cannot enter upon the land for another six or eight months.

Yours sincerely,

x x x
(O. Dhananjayan)

/True copy/

Office of the Chief Engineer, P.W.D. (General)
Chepauk, Madras.5.

Memorandum No.5358 Pww/49-28 dated 8-5-1951.

Sub: Mangalore Water Supply Scheme- Forming of approach road to the head works -
From the Sanitary Engineer, Copy of Memorandum No.6871 W/51-1 WS. dated 13-4-1951, to the Executive Engineer (Public Health), Coimbatore -

DEPUTY SECRETARY 20842 9 MAY 1951 HEALTH DEPARTMENT

In the circumstances reported by the Sanitary Engineer his action in having permitted the Executive Engineer, (Public Health) to take possession of the land required for forming of an approach road and to incur expenditure on that account to the extent necessary is approved.

2. Necessary orders on letter No.6741 W/51-1 WS dated 9-4-1951 are being ~~re~~-issued separately with this office Memorandum No.5358 Pww/49-27 dated 8th May 1951.

not received

A.R.Venkatachari,
Chief Engineer, P.W.D.(General)

To The Sanitary Engineer, Madras.

Endorsement No.5358 PWW/49-29 dated 8-5-1951.

Copy with a copy of Sanitary Engineer's Memorandum No. 6871 W/51-1 WS dated 13-4-1951 to the Executive Engineer, (Public Health) Coimbatore with its enclosures are forwarded to Government for information with reference to correspondence resting with Government Memorandum No.15039 W2/51-1 dated 16-4-51.

Postponed

by Sanitary

To DS. Health Dept

For perusal. The reply of the Ch.Cl. to the Memo on P.I.C.f. may be awaited.

P. 15.5.51

15.5.51

R. Lakshmanan 85757
for Chief Engineer, P.W.D.(General)

The Secretary to Government,
Health Department,
Fort St. George,
Madras.

with a copy of Sanitary Engineer's Memorandum No.6871 W/51-1 WS dated 13-4-1951 to Exe.Engr. (P.H.) Coimbatore with enclos

VERY EMERGENT
C4. 8843/51.

Municipal Office, Mangalore.
Dated the 29th May, 1951.

From

Sri M. Sanjiva Talwar B.A.,B.L.,
Commissioner, Mangalore Municipality, Mangalore.

To

The Secretary to Government,
Health Department. Madras.

Thro'

The Chairman Municipal Council,
Mangalore.

DEPUTY SECRETARY
4 JUN 1951
24801
HEALTH DEPARTMENT

Sub: Acquisition- lands- water supply scheme- revised estimate for forming approach road to Head works- C.R. 971 d/26-5-51 - submitted.

Ref: Govt. Memo. - No. 15039 -10-51-1 Health d/16-4-51.

---

I enclose a copy of C.R. No. 971 d/26-5-51 for your information. The file of papers are resubmitted herewith.

F O R W A R D E D

Commissioner.

Chairman M.C.

Encls: C.R.971 d/26-5-51.
File of papers.

Extract from the proceedings of a meeting of the Municipal Council Mangalore held on 26-5-51.

xx xx xx xx

RESOLUTION NO. 971.

Read: Govt Memo No. 15039/-W2-51-1 Health d/16-4-51 requesting to state how the Council proposes to finance the enhanced cost of work estimated at Rs 63000/- in respect of land acquired in connection with the water supply Seheme and also reference Roc B1 - 3892-51 d/24-4-51 from the Collector of South Kanara requesting to state whether the Municipality has agreed to bear half the contribution mentioned, above.

---

THE ENHANCED COST WILL BE FINANCED FROM THE WATER AND DRAINAGE FUND AND THE MUNICIPALITY HAS ALREADY AGREED TO BEAR HALF THE COST OF ENTIRE SCHEME IN ITS PRIOR RESOLUTION.

Sd. L.C.Pais
Chairman M.C.

/True Extract/

Commissioner.

F/30/5

HEALTH DEPT.(W2)

Water Supply and Drainage - Water Supply - Mangalore Mty. Land Acquisition and approach road to Head works - Revised estimate - Sanctioned.

Read: G.O.Ms.No.903 P.H. dated 11-3-50.

From the C.E, P.W.D.(Genl) Letter No.5358-PWW-49-25, dated 31-3-51.

From the Commr., Mangalore Mty.No.C4-8843/51 dt.29-5-51.

---

ORDER (MS) NO. 2552 HEALTH DT. 18/7/57

In G.O.Ms.No.903 P.H. dated 11-3-50, the Govt. sanctioned ~~the~~ an estimate amounting to Rs.23,300 for the acquisition of the ~~patta~~ land needed for the headworks and the formation of an approach road, in connection with the execution of the first stage of the Mangalore Municipal water supply scheme. The C.E., P.W.D. has accordingly submitted a revised estimate amounting to Rs.63,000 for the ~~above~~ work.

The estimate had to be revised owing to a change in the alignment of the road and an increase in the cost of acquisition and the provision of cross drainage works.

On an examination of the financial position of the Municipal Council, Mangalore, it is found that the Ml.Cl. can meet its share of half the enhanced cost (Rs.19,850) from its own funds. The Ml.Cl. has ~~also~~ agreed to ~~this~~ bear its share.

In the circumstances the Government sanction the revised estimate amounting to Rs.63,000 submitted by the C.E., P.W.D. for the work mentioned in para 1 above, in lieu of the estimate of Rs.23,300 sanctioned in G.O.Ms.No.903 P.H. dated 11-3-50.

To The C.E., P.W.D.(Gl)
The Commr.,
Mangalore Mty.
thro' the C.M.C.

9-7-51 KW 9-7-51 11-7-51

S/c.

Entries in registers

(work plan and estimate at pp 9-24 cf)

Entered in register

HEALTH DEPT.(W2)

---

(Water Supply - Mangalore Municipality - Land Acquisition and approach road to Head works - Revised estimate.

Ref: From the C.E., P.W.D.(Genl) Letter No.5358 PWW49-25 dated 31-3-51.

---

In May 1949, the Government sanctioned the execution, on a half grant half loan basis, of the Mangalore water supply scheme estimated to cost Rs.48.41 lakhs to instal. The first stage of the scheme estimated at Rs.3.15 lakhs is under execution.

2. In G.O.Ms.No.903 P.H. dated 11-8-50 the Govt. sanctioned the estimate amounting to Rs.23,300 for the acquisition of the patta land needed for the Head works and the formation of an approach road in order to facilitate the execution of the first stage of the scheme.

3. The C.E., P.W.D. has submitted a revised estimate amounting to Rs.63,000 for the above items of works. He states ~~that~~ the following ~~are the~~ reasons for the excess over the previous sanctioned estimate:-

(i) change of alignment to avoid submersion of the road even during M.F.L. conditions of the river;

(ii) the difficult nature of the terrain, which requires nearly a ghat road alignment - involving also more very width of land acquisition, than was proposed originally;

(iii) increase in the rate of acquisition per acre of land, as now furnished by the local officers of the Revenue Department and

(iv) provision of cross drainage works found necessary.

4. The Ml.Cl., Mangalore which was asked to state ~~how it proposed~~ to meet the enhanced cost of the work, has in its resolution No.971 dated 26-5-51 stated that the Council's share of the excess cost will be met from the Water Supply and Drainage Account of the Municipal Council. As the scheme was sanctioned already on half grant basis, half of the excess cost of Rs.39,700 will be borne by the Govt.

5. L.A. may be requested to examine the financial position of the Municipal Council and to state whether the Council will be able to meet its share (~~Rs.19~~,850)

of the excess cost from its own funds. They may be requested to pass on the file to Finance with their remarks.

7.6.51.

8.6.51

7.6.51

Health memo
15039 Mz/51-2
8-6-51

L.A.Department.

The Mangalore Ml.Cl. is in a position to meet from its own funds the additional expenditure of Rs.19,850/- referred to at 'A' on pp.1-2 above. The file may be passed on to Finance Deptt.

W.S.D. Accts. 1951-52
C.B. Rs 1.21 lakhs
C.B. Rs 1.34 lakhs

1.S.S.
27.6.51.

27.6.51 Fin

Fin (EA)

The proposal to sanction the revised estimates of Rs 63,000 for the acquisition of lands required for the formation of an approach road in connection with the first stage of the Mangalore municipal water supply scheme, may be agreed to in Finance.

[The increase in the cost (Rs 63,000 — Rs 23,300) over the original estimate Rs 39,700 will have to be shared between the Govt. and the Mcty. half and half. The Mcty. is in a position to meet the addl. expr. from its W.S and Funds]

27/6

R.A.U.O.No. 23571-C/51-
27-6-51

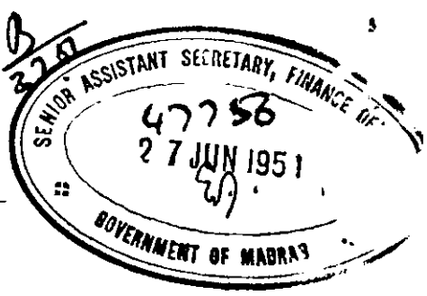

2.7.51

47756
2A/51-1
3-7-57

The proposal in this file is to sanction ~~the~~ a revised estimate amounting to Rs.63,000 submitted by the C.E. for the acquisition of the ~~patta~~ land required for the head works ~~of the Mangalore water supply scheme~~ and the formation of an approach road in connection with the first stage of the Mangalore W.S. scheme in lieu of the original estimate of Rs.23,000 sanctioned in March 1950. As the scheme was sanctioned on half grant basis, half of the excess cost of Rs.39,700 will be borne by the Govt. The Ml.Cl., Mangalore has agreed to meet half the excess cost (Rs.19,850) from its own funds. It is proposed to sanction the revised estimate. L.A. and Finance have agreed to the proposal. A draft order is submitted. May be circulated to H.M.(H) and H.M. ~~(L.A.)~~ (Finance) for approval.

15 cf (H)

p. 35 cf

p. 2 ante

note p. 3 n 2 (H)

9.7.51. 9.7.51

11.7.51

12/7/51 H.M(H) ✓

9 H.M(Fin) ✓
13.7

SECRETARY
17 JUL 1951
HEALTH DEPARTMENT

G.O.Ms.No. 2552. H. d. 18/7/51